



A New Era of High
Efficiency
Scalable Computing for
Breakthrough
Performance

SYSTEM HIGHLIGHTS

- Purpose-built for data-intensive computing
- Integrated visualization and storage Infrastructure based on SGI® InfiniteStorage and VUE product lines
- Efficient blade architecture reduces complexity, minimizes downtime and simplifies management
- Factory integrated SGI “power up & go” design for rapid deployment and immediate productivity


SGI® Altix® ICE

Designed with Processing Efficiency in Mind

SGI Altix ICE was built with efficient throughput performance in mind. The SGI Altix ICE integrated blade architecture was designed from the ground up to minimize system overhead and communication bottlenecks that can rob efficiency and scalability especially for data intensive workflows. SGI Altix ICE combines the powerful Intel® Xeon® processor 5500 series architecture with a unique board and interconnect design that delivers up to 512 processor cores in a single rack, and easily scaling to thousands of nodes to address the most challenging compute problems. And, with flexibility to optimize for sheer performance or price/performance, SGI Altix ICE delivers breakthrough value by precisely addressing customer needs—today and tomorrow.

Across the Board Efficiency with Maximum Uptime and Simplified Usage

SGI Altix ICE raises the bar for TCO value in a platform designed to drive power/cooling efficiency and advanced reliability, easily addressing the demanding requirements of today’s data center. The SGI Altix ICE platform leverages SGI field-proven power and cooling technology innovations, developed from years of SGI supercomputer experience. SGI has leveraged this and other SGI technology innovations in SGI Altix ICE, virtually eliminating cables, wasted space and energy loss while designing in system component redundancy for enhanced reliability. The SGI Altix ICE diskless blade architecture further enhances security, reliability and eliminates a critical point of system failure, while reducing power/cooling requirements

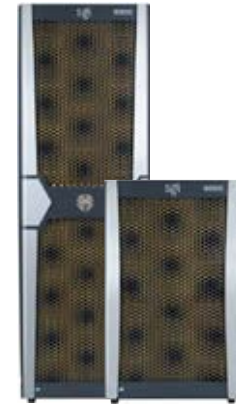

and overall system cost. The result? A system with unmatched reliability, efficiency, performance, and overall value.

“Power Up & Go” with SGI Altix ICE

The SGI Altix ICE “Power Up & Go” design delivers 6 TFlops of compute power per rack for an immediate boost in processing power and productivity. An elegant design that integrates blades, switches, interconnect, storage, and visualization, makes it easy to build and manage SGI Altix ICE systems. SGI follows the same design principle of “simple and clean” on the software side, delivering SGI Altix ICE as a fully integrated system that ships with the SGI® Tempo systems management tool, supplemented by the SGI® ProPack™ library, with features to further enhance application efficiency and software development. SGI Altix ICE sets a new standard for simplicity and ease of use in the world of scale-out computing.

Designed to Address the Growing Data Intensive Pain Point

With 25+ years of solving the worlds most data intensive computing and visualization problems, SGI imparts that DNA into the complete range of SGI high-performance server, visualization, and storage solutions along with industry-leading professional services and support to enable customers to efficiently overcome the challenges of complex dataintensive workflows and accelerate breakthrough discoveries, innovation, and information transformation.





SGI® Altix® ICE

Configuration Specifications

www.sgi.com/servers

Compute Blades	IP-83	IP-85	IP-95
Processors	<ul style="list-style-type: none"> Intel® Xeon® 5200 Series Intel® Xeon® 5400 Series 	<ul style="list-style-type: none"> Intel® Xeon® 5200 Series Intel® Xeon® 5400 Series 	<ul style="list-style-type: none"> Intel® Xeon® 5500 Series
Memory/IO	<ul style="list-style-type: none"> 8 fully buffered memory DIMM slots per blade 1GB, 2GB, and 4GB 800MHz DIMMs 	<ul style="list-style-type: none"> 16 fully buffered memory DIMM slots per blade 1GB, 2GB, and 4GB 800MHz DIMMs Low profile PCIe x16 networking slot 	<ul style="list-style-type: none"> 12 DDR3 DIMM slots per blade 2GB, 4GB, 8GB 1066MHz and 1333MHz DIMMs
Blade Enclosures	ICE 8200LX	ICE 8200EX	
Interconnect	<ul style="list-style-type: none"> Two 20Gb/sec IB switch blades, one high performing plane Hypercube or Fat Tree topology 	<ul style="list-style-type: none"> Four 20Gb/sec IB switch blades, two high performing planes Hypercube or Fat Tree topology 	
Power and Cooling	<ul style="list-style-type: none"> Dedicated Gigabit Ethernet administrative network, chassis management controller 7+1 redundant 1625W 12V DC output front-end power supplies / 7+1 redundant 175mm blowers 		
Storage	Network Attached Storage Solutions (NAS)		
High-performance IOPB	<ul style="list-style-type: none"> SGII® InfiniteStorage NEXIS 9000 SGI® InfiniteStorage NEXIS 2000 		
Racks	<ul style="list-style-type: none"> 42U (30"W x 40"D) Tall Rack Each rack supports up to 4 blade enclosures, each with up to 16 2-socket with up to 2 blade enclosures blades, accommodates up to 128 sockets and 512 cores per rack Standard 19" racks also supported, each and 10U of extra space for storage Cooling: Air (standard) or water (optional) 		
Hierarchical Controller Management Framework (HMF)	System Administration Controller [Tier 1]	Rack Leader Controller (RLC) [Tier 2]	Chassis Management Controller (CMC) [Tier 3]
Controllers	<ul style="list-style-type: none"> One per SGI Altix ICE system Provisions out software to RLC Pulls aggregated cluster management data from RLC 	<ul style="list-style-type: none"> Minimum one per rack node and via IB to two blade enclosures Holds blade boot images Runs fabric management software Aggregates cluster management data for rack 	<ul style="list-style-type: none"> One per blade enclosures Controls master power to all compute nodes Monitors power and blade enclosure environment
Service Nodes	<ul style="list-style-type: none"> Login Service Node (minimum one per system) Gateway Service Node Batch Service Node Storage Service Node (may be used to satisfy login service node minimum requirement) 		
System Software	<ul style="list-style-type: none"> SUSE® Linux Enterprise Server 10 Red Hat® Enterprise Linux 5 		
Cluster Solution Stack	<ul style="list-style-type: none"> Optimized drivers and system monitoring: SGI Foundation Software 1 Optimized system and application performance: SGI ProPack™ 6 for Linux® 	<ul style="list-style-type: none"> Cluster Management Software: SGI® Tempo or Platform™ Manager Job Scheduling/ Workload Management: Altair® PBS Professional™ Fabric Manager: SGI InfiniBand Fabric Manager with OpenSM InfiniBand Host Stack: SGI OFED 1.4 	
Software Development			Development Tools
Programming Languages and Debuggers	<ul style="list-style-type: none"> C & C++: Intel C++ Compiler, GNU GCC Fortran: Intel Fortran Compilers (Fortran 95), GNU GCC (Fortran77) Debuggers: Intel Debugger included with Intel compilers, GNU GDB TotalView Debugger and MemoryScape Memory Debugger Intel® Thread Checker 		<ul style="list-style-type: none"> Intel®VTune Performance Analyzer Intel® Trace Analyzer & Collector Interactive Supercomputing Star-P®
Libraries	<ul style="list-style-type: none"> Intel® Math Kernel Library Intel® Integrated Performance Primitives Intel® Threading Building Blocks Intel® MPI Library 		<ul style="list-style-type: none"> Platform MPI OpenMP included with Intel compilers SGI Message Passing Toolkit

* RedHat Enterprise Linux Advanced Server 4 support is limited to 128 cpu cores and 1TB of memory. RedHat Enterprise Linux Advanced Server 5 support is limited to 128 sockets and 1TB GB of memory.

